


**Head Office** Unit 1, 30 Bluett Drive, Smeaton Grange NSW 2567  
T (02) 4646 1660 F (02) 4647 3700 E [admin@hychem.com.au](mailto:admin@hychem.com.au) W [www.hychem.com.au](http://www.hychem.com.au)



**HYCHEM**  
CONSTRUCTION RESINS

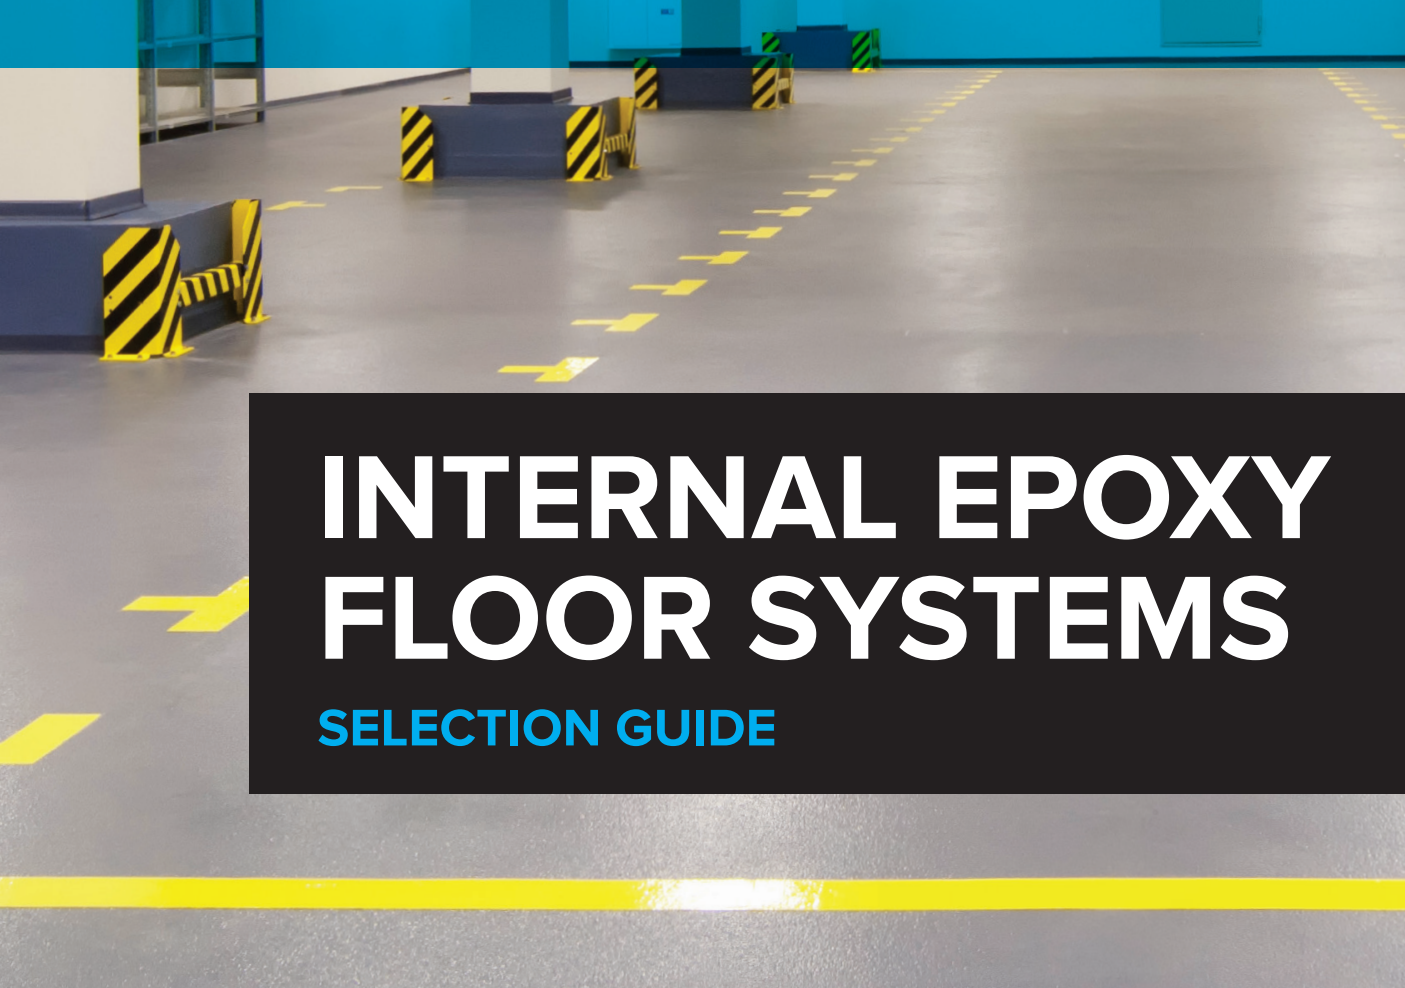

# INTERNAL EPOXY FLOOR SYSTEMS

## SELECTION GUIDE



**Authorised applicator**  
**Concreting & Decorative Finishes**  
U8/12-14 Expo Court, Ashmore QLD 4214  
T Office: 1300 88 55 79 W [www.cdf.net.au](http://www.cdf.net.au)

# HYCHEM INTERNAL EPOXY FLOOR SYSTEMS SELECTION GUIDE


AUSTRALIAN OWNED & MANUFACTURED • APAS APPROVED • SUITABLE FOR ALL GOVERNMENT WORK • WARRANTIES AVAILABLE VIA APPROVED APPLICATORS

## ENTRY LEVEL | EPOXY FLOOR SYSTEM

**COATS / THICKNESS** 3 COATS @ APPROX 0.4–0.5mm

**RECOMMENDED FOR** GARAGES / RETAIL / OFFICES, etc.

- 1 Primer Roll Coat – Hychem E100
- 2 Pigmented Roll Coat – Hychem Supafloor
- 3 Pigmented Roll Coat – Hychem Supafloor

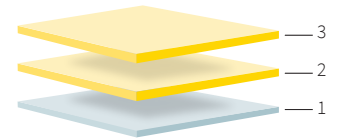


## BRONZE | EPOXY FLOOR SYSTEM

**COATS / THICKNESS** 4 COATS @ APPROX 0.6–1mm (depending on aggregate size)

**RECOMMENDED FOR** CAR PARKS / PLANT ROOMS / STOREROOMS / WALKWAYS & CORRIDORS / WAREHOUSING, etc.

**WARRANTY** 5 YEARS – TYPICALLY PERFORMS TWICE AS LONG

- 1 Primer Roll Coat – Hychem E100
- 2 Pigmented Roll Coat – Hychem Supafloor broadcast with silica sand
- 3 Pigmented Roll Coat – Hychem Supafloor
- 4 Pigmented Roll Coat – Hychem Supafloor

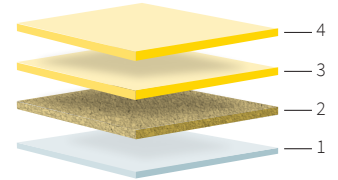


## SILVER | FLAKE DECORATIVE EPOXY FLOOR SYSTEM

**COATS / THICKNESS** 5 COATS + FLAKE @ APPROX 0.7–0.8mm

**RECOMMENDED FOR** SHOWROOMS / GARAGES / AMENITIES / SCHOOLS / CORRIDORS, etc.

**WARRANTY** 5 YEARS – TYPICALLY PERFORMS TWICE AS LONG

- 1 Primer Roll Coat - Hychem E100
- 2 Pigmented Roll Coat – Hychem Supafloor
- 3 Broadcast of Hychem Hyflake into wet Supafloor
- 4 Clear Roll Coat – Hychem PA Glaze 3
- 5 Clear Roll Coat – Hychem PA Glaze 3

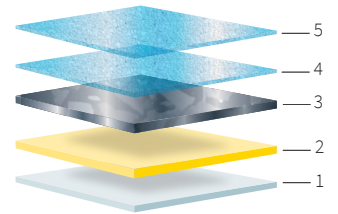


## GOLD | EPOXY FLOOR SYSTEM

**COATS / THICKNESS** 4 COAT SYSTEM @ APPROX 3.5–4.5mm (depending on aggregate size)

**RECOMMENDED FOR** FACTORIES / FOOD MANUFACTURING & SERVICE / GENERAL MANUFACTURING / WASH BAYS, etc.

**WARRANTY** 7 YEARS – TYPICALLY PERFORMS TWICE AS LONG

- 1 Primer Roll Coat – Hychem E100
- 2 Self Levelling Trowel Coat – Hychem E300SL broadcast with silica sand
- 3 Pigmented Roll Coat – Hychem Supafloor
- 4 Pigmented Roll Coat – Hychem Supafloor

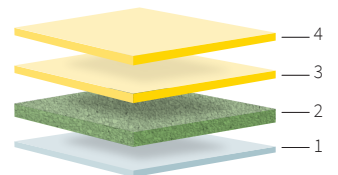


## MOTORTUFF | EPOXY FLOOR SYSTEM

**COATS / THICKNESS** 5 COAT SYSTEM @ APPROX 5–6mm (depending on aggregate size)

**RECOMMENDED FOR** HIGH IMPACT ZONES: WORKSHOPS, etc.

**WARRANTY** 10 YEARS – TYPICALLY PERFORMS TWICE AS LONG

- 1 Self Levelling Roll/Squeegee Coat – Hychem E300SL and broadcast with silica sand whilst wet
- 2 Self Levelling Trowel/Squeegee Coat – Hychem E300SL and broadcast with silica sand whilst wet
- 3 Pigmented Roll Coat – Hychem Supafloor
- 4 Pigmented Roll Coat – Hychem Supafloor
- 5 Clear Roll Coat – Hychem PA Glaze 3

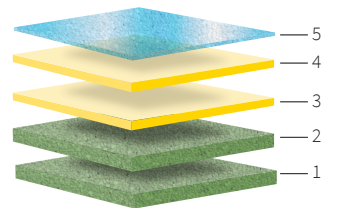

## PLATINUM | EPOXY FLOOR SYSTEM – RESIN RICH FLOOR

**COATS / THICKNESS** 7 coat system @ approx. 5–6mm

**RECOMMENDED FOR** HIGH IMPACT ZONES: WORKSHOPS / ABATTOIRS, etc.

**WARRANTY** 12 YEARS – TYPICALLY PERFORMS TWICE AS LONG

- 1 Primer Roll Coat – Hychem E100 Primer
- 2 Primer Roll Coat – Hychem E100 Primer (second primer to prevent outgassing/blisters in SL coats)
- 3 Self Levelling Roll/Squeegee – Hychem E300SL
- 4 Self Levelling Trowel Coat – Hychem E300SL
- 5 Pigmented Roll Coat – Hychem Supafloor broadcast with Aluminium Oxide aggregate
- 6 Pigmented Roll Coat – Hychem Supafloor
- 7 Clear Roll Coat – Hychem PA Glaze 3

